


Forward Fair to Compare




Forward		Bend Pak	Challenger	Challenger	Quality	Whip	
Models							
		I10	MX10-ACX	CL10	X10	Q10	WA-10
A.	Capacity	10,000	10,000	10,000	10,000	10,000	10,000
B.	Overall Height	143 1/8"	12'-1"	11'-8"	12'- 7-1/2"	12' - 3-1/2"	11'- 9-1/2"
C.	Height to Shut-Off	136 1/4"	11'-7"	11' - 2-1/2"	12'-0"	11'- 8 1/2"	11'-3"
D.	Min.um Ceiling Height	12'	12'-6"	12'	13'	12'-5"	12'
E.	Min. Lifting Height	3-5/8"	4"	4-1/8"	4-3/4"	4"	4-3/4"
F.	Max. Lifting Height	77"	78"	74-5/8"	79-1/8"	78-1/2"	79-1/2"
G.	Overall Floor Width	131" / 137"	12'-1"	11'-11"	10'- 11-1/2"	10' 9"	11' - 6-1/2"
H.	Inside Column Width	109 3/4" / 115 3/4"	114"	114-1/2"	109-7/8"	113"	115"
I.	Drive Through	97" / 103"	100"	105"	98"	98 3/8"	104"
J.	Truck Adapter Heights	1 5", 3",6"	Screw-up	Screw-up	Screw-up	Screw-up	Screw-up
K.	Voltage	208-230	220	208-231	208-231	208-230	208-230
L.	Amps	20	20	20	20	20	20
M.	Motor	1 Ph	1 Ph.	1 Ph.	1 Ph.	1 Ph	1 Ph
N.	Speed of Rise	60 Sec.	45 Sec.	48 Sec.	52 Sec.	N/A	50 Sec.
O.	ETL Certified	Yes	Yes	Yes	No	Yes	No
P.	ALI Member	Yes	Yes	Yes	Yes	Yes	No
Q.	Latch Release Design	Single Point	Single Point	Single Point	Single Point	Single Point	Single Point

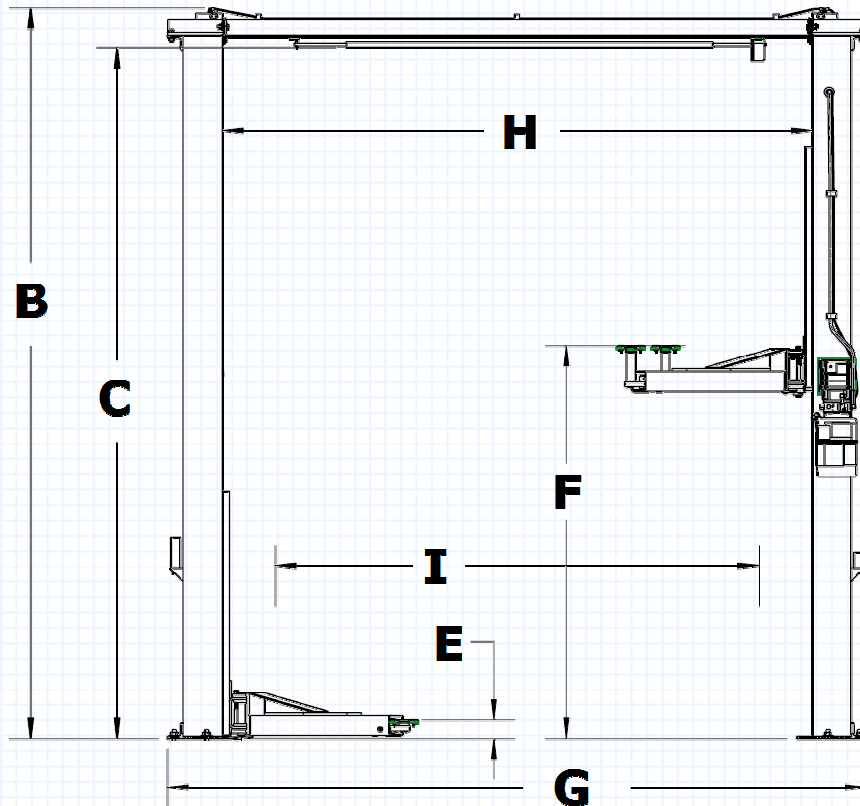

Forward Fair to Compare




Forward		Bend Pak	Challenger	Challenger	Quality	Whip	
		Models					
		DP10A	MX10-ACX	CL10	X10	Q10000	WA-10
A.	Capacity	10,000	10,000	10,000	10,000	10,000	10,000
B.	Overall Height	143 3/8" or 167"	12'-1"	11'-8"	12'- 7-1/2"	12' - 3-1/2"	11'- 9-1/2"
C.	Height to Shut-Off	136" or 160"	11'-7"	11' - 2-1/2"	12'-0"	11'-9"	11'-3"
D.	Min.um Ceiling Height	12' or 14'	12'-6"	12'	13'	12'-6"	12'
E.	Min. Lifting Height	3-5/8"	4"	4-1/8"	4-3/4"	5"	3.5"
F.	Max. Lifting Height	77" or 86"	78"	74-5/8"	79-1/8"	78-1/2"	79-1/2"
G.	Overall Floor Width	131"/137"	12'-1"	11'-11"	10'- 11-1/2"	11' - 3-3/4"	11' - 6-1/2"
H.	Inside Column Width	109 3/4"/ 115 3/4"	114"	114-1/2"	109-7/8"	113"	115"
I.	Drive Through	99"/ 105"	100"	105"	98"	99"	96"
J.	Truck Adapter Heights	1.5", 3", 6"	Screw-up	Screw-up	Screw-up	Screw-up	Screw-up
K.	Voltage	208-230	220	208-231	208-231	208-230	208-231
L.	Amps	20	20	20	20	20	20
M.	Motor	1 Ph	1 Ph.	1 Ph.	1 Ph.	1 Ph	1 Ph
N.	Speed of Rise	60 Sec.	45 Sec.	48 Sec.	52 Sec.	48Sec.	50 Sec.
O.	ETL Certified	Yes	Yes	Yes	No	Yes	No
P.	ALI Member	Yes	Yes	Yes	Yes	Yes	No
Q.	Latch Release Design	Single Point	Single Point	Single Point	Single Point	Single Point	Single Point

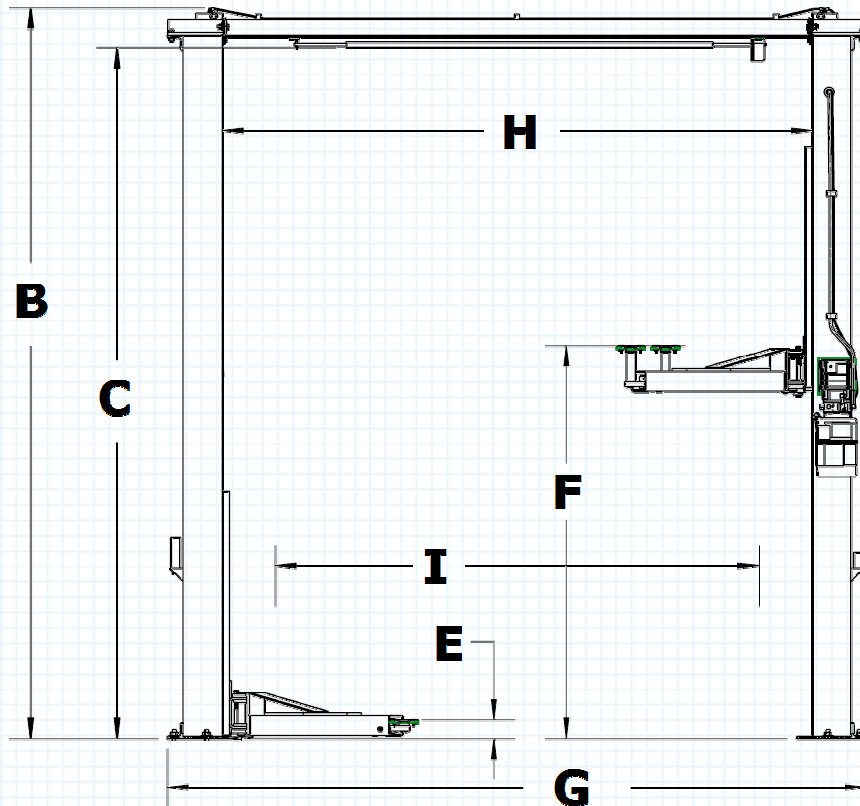

Forward Fair to Compare



Forward		Bend Pak	Challenger	Challenger	Quality	Whip	
Models							
		DP10S	MX10-ACX	CL10	X10	Q10000	WA-10
A.	Capacity	10,000	10,000	10,000	10,000	10,000	10,000
B.	Overall Height	143 3/8" or 167"	12'-1"	11'-8"	12'- 7-1/2"	12' - 3-1/2"	11'- 9-1/2"
C.	Height to Shut-Off	136" or 160"	11'-7"	11' - 2-1/2"	12'-0"	11'-9"	11'-3"
D.	Minimum Ceiling Height	12' or 14'	12'-6"	12'	13'	12'-6"	12'
E.	Minimum Lifting Height	3-5/8"	4"	4-1/8"	4-3/4"	5"	3.5"
F.	Maximum Lifting Height	77" or 86"	78"	74-5/8"	79-1/8"	78-1/2"	79-1/2"
G.	Overall Floor Width	131"/137"	12'-1"	11'-11"	10'- 11-1/2"	11' - 3-3/4"	11' - 6-1/2"
H.	Inside Column Width	109 3/4" / 115 3/4"	114"	114-1/2"	109-7/8"	113"	115"
I.	Drive Through	99"/105"	100"	105"	98"	99"	96"
J.	Truck Adapter Heights	1.5", 3", 6"	Screw-up	Screw-up	Screw-up	Screw-up	Screw-up
K.	Voltage	208-230	220	208-231	208-231	208-230	208-231
L.	Amps	20	20	20	20	20	20
M.	Motor	1 Ph	1 Ph.	1 Ph.	1 Ph.	1 Ph	1 Ph
N.	Speed of Rise	60 Sec.	45 Sec.	48 Sec.	52 Sec.	48Sec.	50 Sec.
O.	ETL Certified	Yes	Yes	Yes	No	Yes	No
P.	ALI Member	Yes	Yes	Yes	Yes	Yes	No
Q.	Latch Release Design	Single Point	Single Point	Single Point	Single Point	Single Point	Single Point

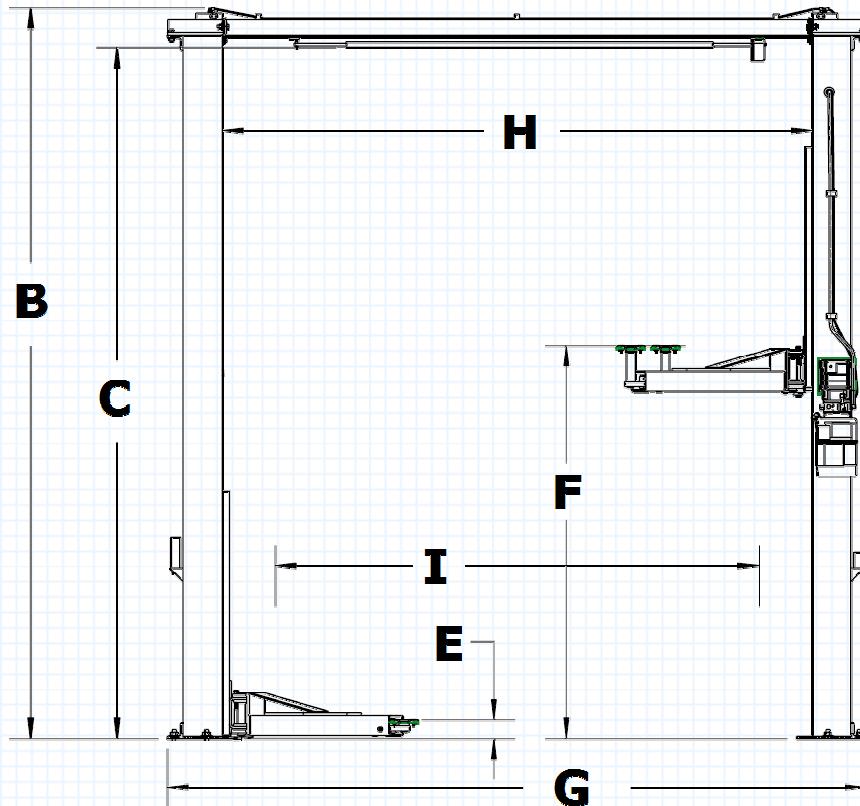

Forward Fair to Compare



Forward		Bend Pak	Challenger	Challenger	Quality	Whip	
		Models					
		BP9	MX10-ACX	CL10	X10	Q10000	WA-10
A.	Capacity	9,000	10,000	10,000	10,000	10,000	10,000
B.	Overall Height	9' -1 1/2"	12'-1"	11'-8"	12'- 7-1/2"	12' - 3-1/2"	11'- 9-1/2"
C.	Height to Shut-Off	N/A	11'-7"	11' - 2-1/2"	12'-0"	11'-9"	11'-3"
D.	Minimum Ceiling Height	9' 5"	12'-6"	12'	13'	12'-6"	12'
E.	Minimum Lifting Height	3 1/2"	4"	4-1/8"	4-3/4"	5"	3.5"
F.	Maximum Lifting Height	80 1/2"	78"	74-5/8"	79-1/8"	78-1/2"	79-1/2"
G.	Overall Floor Width	138 1/2"	12'-1"	11'-11"	10'- 11-1/2"	11' - 3-3/4"	11' - 6-1/2"
H.	Inside Column Width	111"	114"	114-1/2"	109-7/8"	113"	115"
I.	Drive Through	97 1/4"	100"	105"	98"	99"	96"
J.	Truck Adapter Heights	1 1/4", 5"	Screw-up	Screw-up	Screw-up	Screw-up	Screw-up
K.	Voltage	208-231	220	208-231	208-230	208-230	208-231
L.	Amps	20	20	20	20	20	20
M.	Motor	1 Ph	1 Ph.	1 Ph.	1Ph	1 Ph	1 Ph
N.	Speed of Rise	60 Sec.	45 Sec.	48 Sec.	52 Sec.	48Sec.	50 Sec.
O.	ETL Certified	Yes	Yes	Yes	No	Yes	No
P.	ALI Member	Yes	Yes	Yes	Yes	Yes	No
Q.	Lock Latch Release Design	Dual Point	Single Point	Single Point	Single Point	Single Point	Single Point

